

RELAX CLESSIDRA STONE


NEWS
2021



Uscita Fumi Posteriore

Rear Exhaust Fume Outlet - Salida De Humos Trasera - Sortie De Fumée Arrière - Rauchausgang Hinten

TECHNOLOGY

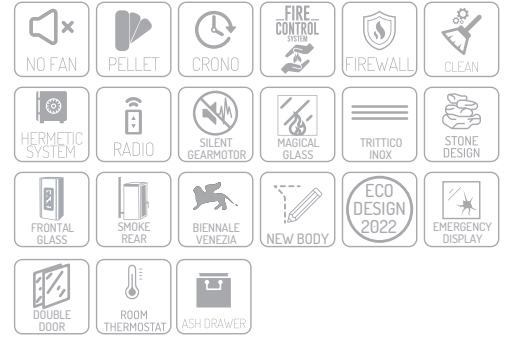

OPTIONAL



Potenza Globale
Global Power
Puissance globale
Potencia global
Verdrehmomentleistung

Potenza Nominale
Nominal Power
Puissance Nominale
Potencia Nominal
Nennleistung

Rendimento totale
Total efficiency
Puissance globale
Potencia global
Pellet Wirkungsgrad

Peso
Weight
Poids
Peso
Gewicht

Consumo min-MAX
Min-Max consumo
Consumation min-MAX
Consumo min-maxi
Min-Maxi verbrauch

Temperatura gas di scarico
Exhaust gas temperature
Température des gaz d'échappement
Temperatura de los gases de escape
Abgasstemperatur

Tiraggio richiesto in funzionamento
Draw required in operation
Dessiner nécessaire en fonctionnement
Dibujar requerido en la operación
Erforderlicher Betriebszuzug

Uscita fumi
Chimney Output
Sortie conduit de cheminée
Solido conducto de humos
Rauchauslass

Ingresso aria
Air inlet
Entrée d'air
Entrada aire
Lufteinlass

Serbatoio pellet
Pellet tank
Pélel tank
Deposito
Tank Fassungsvermögen

Assorbimento elettrico watt
Electrical consumption watt
Absorption électrique watt
Consumo de electricidad watt
Elektrischer Verbrauch watt

| | KW 14 | KW 12,2-3,6 | % 87,2 | Kg 180 | Kg/H 0,8-2,9 | °C 232 | Pa 3 | mm 80 | mm 60 | Kg 18 | M270-N93-R45 |
|----------|---------|-------------|--------|--------|--------------|--------|------|-------|-------|-------|--------------|
| RELAX 11 | KW 12,6 | KW 11,0-3,6 | % 87,6 | Kg 180 | Kg/H 0,8-2,6 | °C 217 | Pa 3 | mm 80 | mm 60 | Kg 18 | M270-N91-R45 |
| RELAX 9 | KW 10,1 | KW 9,0-3,6 | % 88,3 | Kg 180 | Kg/H 0,8-2,0 | °C 189 | Pa 3 | mm 80 | mm 60 | Kg 18 | M270-N89-R45 |

*Le Caldaie e le Stufe con sistema CLEAN svuotano il cassetto ceneri dopo un intero BANCALE di PELLETT bruciato.

